


SUNRICHER

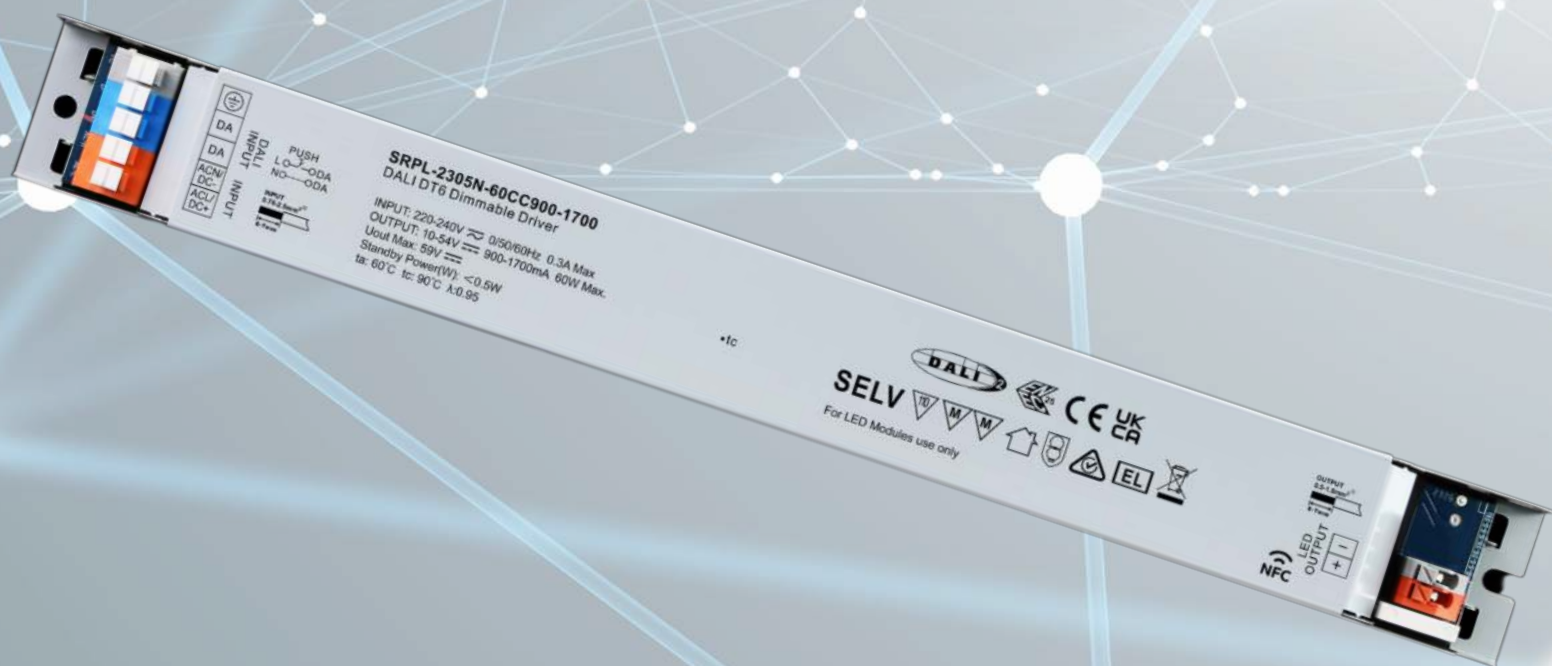

5 YEAR
WARRANTY

60W

Constant Current Linear LED Driver with DALI-2 NFC

Features of the:
SRPL-2305N-60CC900-1700



Constant
Current



PushDimming
(VAC)



DALI 2 Protocol



In built
applications



NFC
Compatible




Class II Power
Supply

CE IP20 SELV

Specification

Model		SRPL-2305N-60CC900-1700
Output	DC Voltage Range	10 ~ 54V
	Rated current	900-1700mA via NFC setting; Min.current gear lower to 0.1mA,Default 1500mA
	Current Accuracy	±3%(±1%@Certain full load) @ full load
	Rated power	60W
Input	Voltage Range	220-240VAC
	Frequency range	50/60Hz
	Power Factor (Typ.)	> 0.98@230VAC (Full load)
	Total Harmonic Distortion	THD ≤ 5% (@ full load / 230VAC)
	Efficiency (Typ.)	>87% @ 230VAC full load
	AC Current (Max)	0.4A @ 230VAC
	Inrush Current (Typ.)	Max.25.9A at 230VAC; 148μs duration
	Leakage current	< 5mA/230VAC
	Standby Power Consumption	<0.5W
	Anti Surge	L-N: 2KV
Control	Dimming Interface	DALI Device Type 6 (DALI consumption < 2mA)/ AC Push
	Dimming Range	0.01%-100%@ Max current
	Dimming Method	Amplitude/CCR dimming
	Dimming Curve	Linear/ Logarithmic optional
Protection	Short Circuit	Yes, recovers automatically after fault condition is removed
	Over Current	Yes, recovers automatically after fault condition is removed
	Over Temperature	Yes, recovers automatically after temperature drop
Environment	Working TEMP.	-25°C ~ +60°C
	Max. Case Temp	TC=90°C
	Working humidity	10%-95% RH (non-condensing)
	Storage TEMP humidity	40°C ~ +80°C, 10% ~ 95% RH
Safety & EMC	Safety standards	EN61347-1, EN61347-2-13
	Withstand voltage	I/P-O/P: 3.75KVAC
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70% RH
	EMC emissions	EN55015, EN61000-3-2, EN61000-3-3
	EMC Immunity	EN61547, EN61000-4-2,3,4,5,6,8,11
Others	Size	285x30x21 mm (L*W*H)
	Weight	0.30kgs
	Warranty	5 Years
Notes	1. DO NOT select dimming input with power applied to the device. 2. DO NOT install with power applied to device. 3. DO NOT expose the device to moisture.	

Mechanical Specification

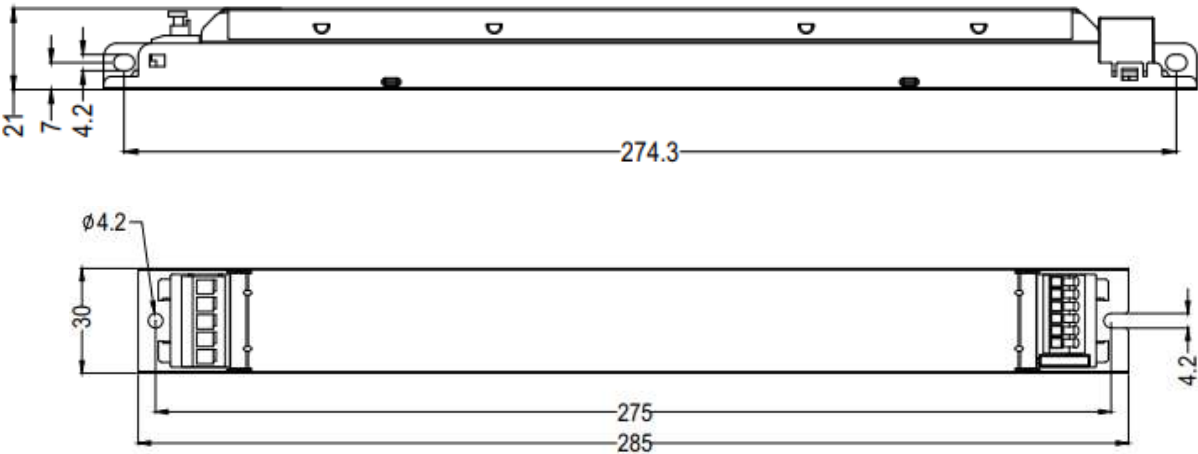


Wiring Diagrams & Dimming

DALI



Push Dimming

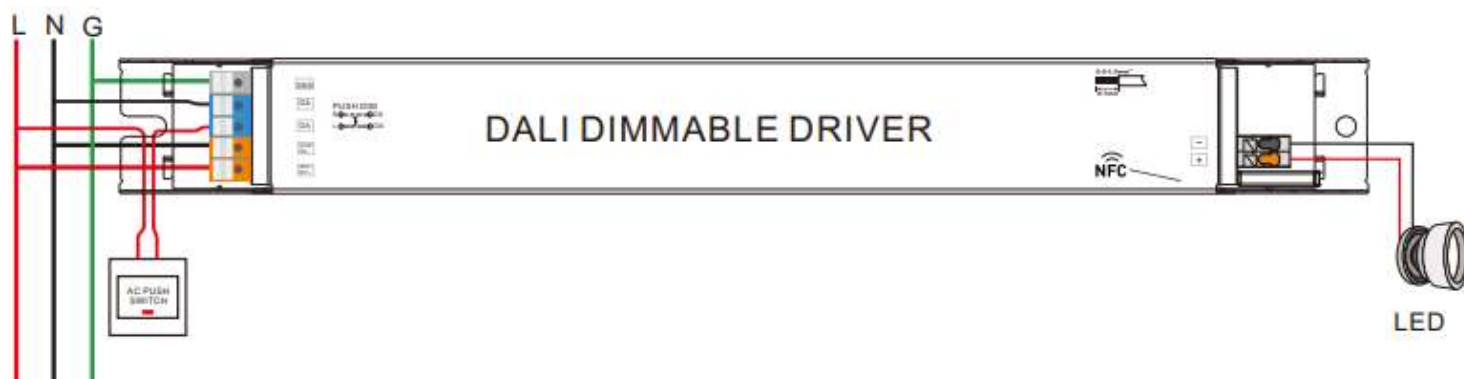

Operation

With DALI Master:

1. DALI Address
- 1 DALI address for 1 channel output are assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations


With NFC Programming Devices:

Note:


1. Do wiring according to the wiring diagram and power on the DALI system
2. Recommend setting parameters without power-on the DALI devices
3. Please make sure your mobile phone has NFC function and enable it

Wiring Diagrams & Dimming


Operating Window

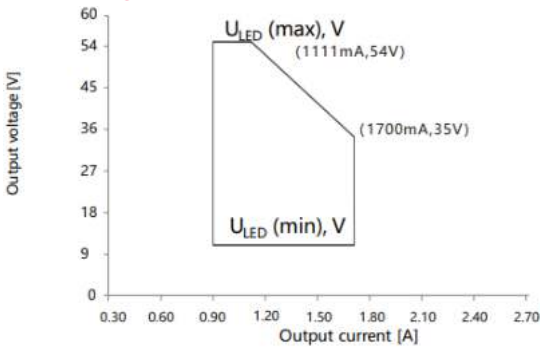


Driver Performance

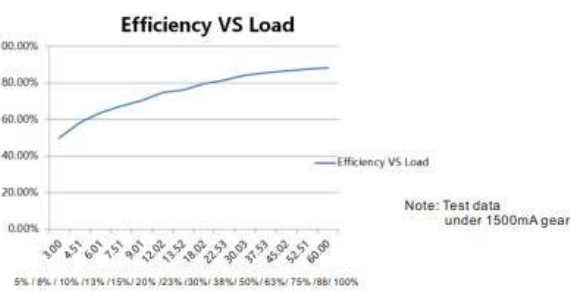


Dimming Curve

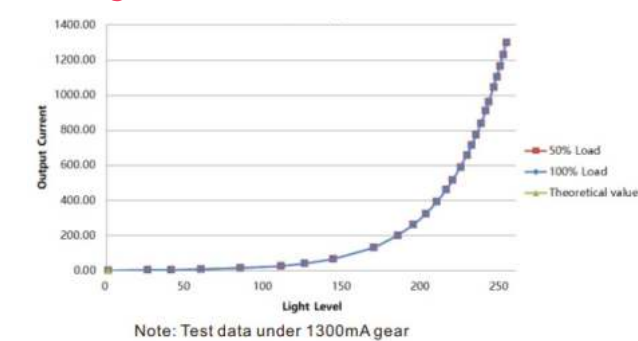

Driver Performance

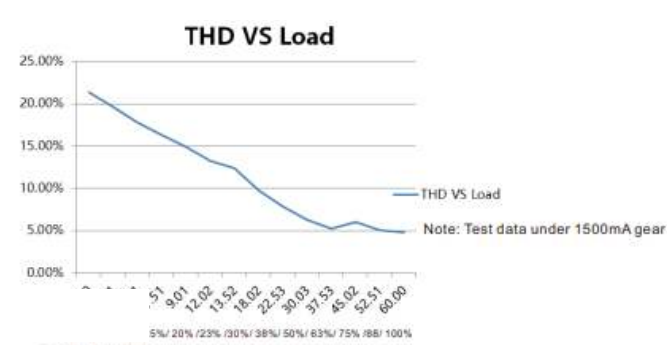

Driver Performance

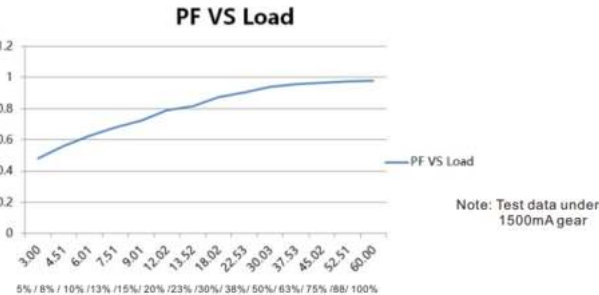


Expected Lifetime

Module Number	Output current	Ta	30 °C	40 °C	45 °C	•••	60 °C
SRPL-2305N-60CC900-1700	900 – 1700 mA	Tc	52 °C	62 °C	66 °C	•••	90 °C(max)
SRPL-2309N-60CCT900-1700	900 – 1700 mA	Lifetime	> 100,000 h	> 80,000 h	> 60,000 h		> 25,000 h

The LED driver is designed for a lifetime stated above under reference conditions.
The relation of tc to ta temperature depends also on the luminaire design.

MCB Load Quality

Module Number	Ipeak	Twidth	Max.quantity of LED Driver per MCB															
			B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25	
SRPL-2305N-60CC900-1700	25.9A	148µs	15	20	24	30	38	18	23	28	35	44	20	26	32	40	50	
SRPL-2309N-60CCT900-1700	25.9A	148µs	15	20	24	30	38	18	23	28	35	44	20	26	32	40	50	




Note:

- Those MCB parameters are based on ABB S200 series circuit breakers.
- For different brands and models of miniature circuit breakers, the quantity of drivers will have difference.
- Please do not exceed the above-mentioned quantity during on-site installation, and the specific load quantity shall be subject to on-site installation.
- When the installation environment temperature of MCBs exceeds 30°C or when multiple MCBs are installed side by side, the number of mounted drives will be reduced, which requires recalculation.
- Type C MCB's are strongly recommended to use with LED lighting

Operation - Working with 'SR NFC Tool' App

Step 1: Download the APP (searching "SR NFC Tool" from App Store and Google Play) . Open APP.

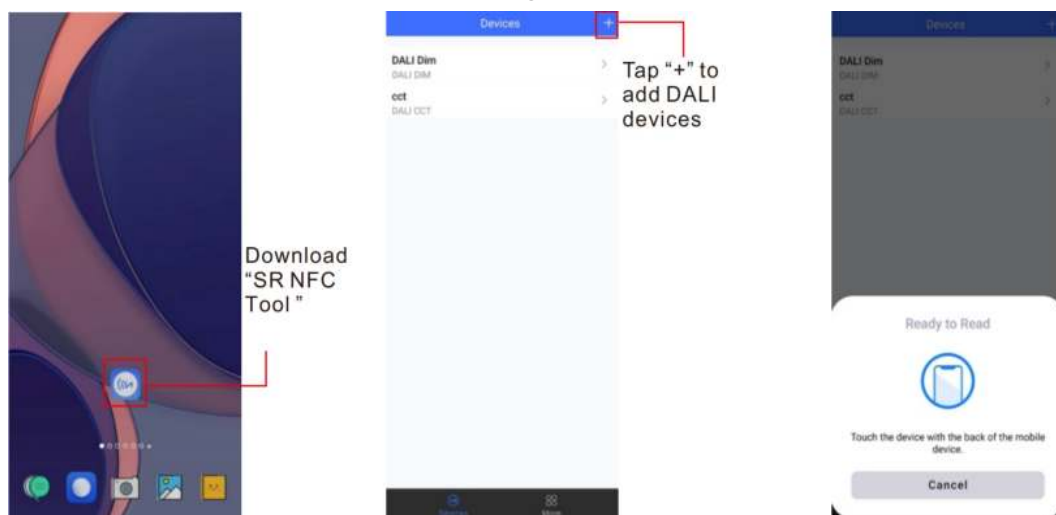

Note:

1. Please make sure that you have enabled NFC function with your mobile phone/ tablet.
2. Please make sure that the "NFC position" is matched.
3. Please do not power on the device before setting.
4. Please If you can't download "SR NFC Tool". Please contact with us
5. Please refer to QR code below

Apple QR Code:




Android QR Code:



Step 2: Add device, and name it as you wish.



Step 3: Unlock device, enter parameters configuring page.

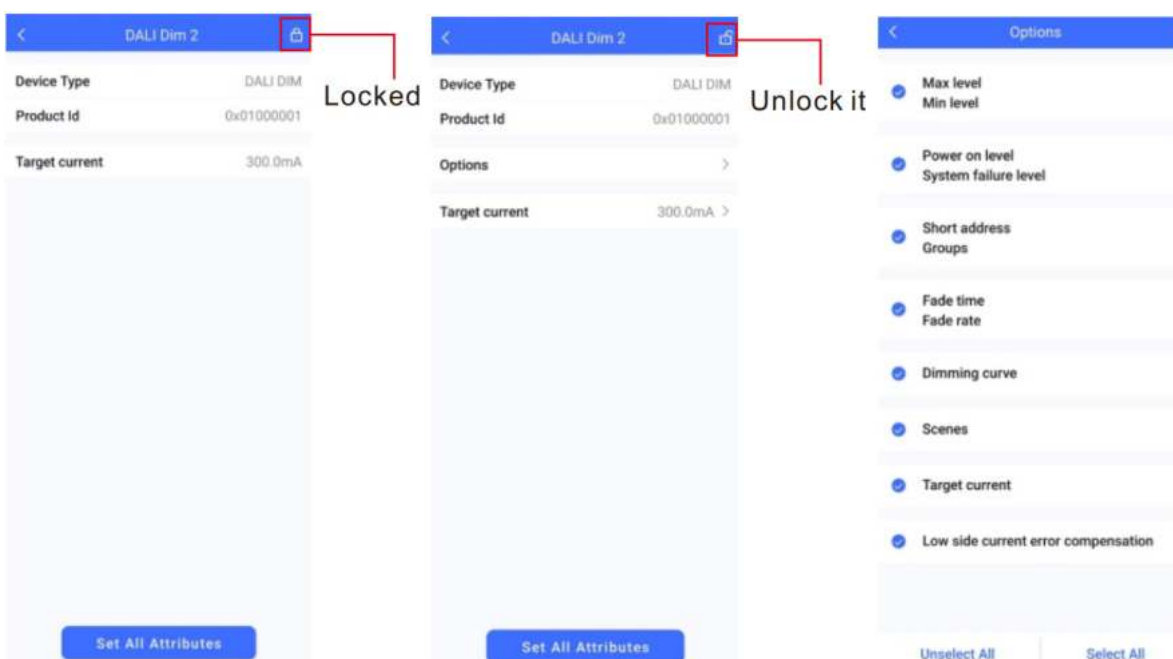


Notes:


1. You have to unlock the device then do some settings
2. Only when the corresponding function is selected, the function interface will be displayed.

Operation

Step 4: Few parameter interface, you can choose the setting based on your requirements.

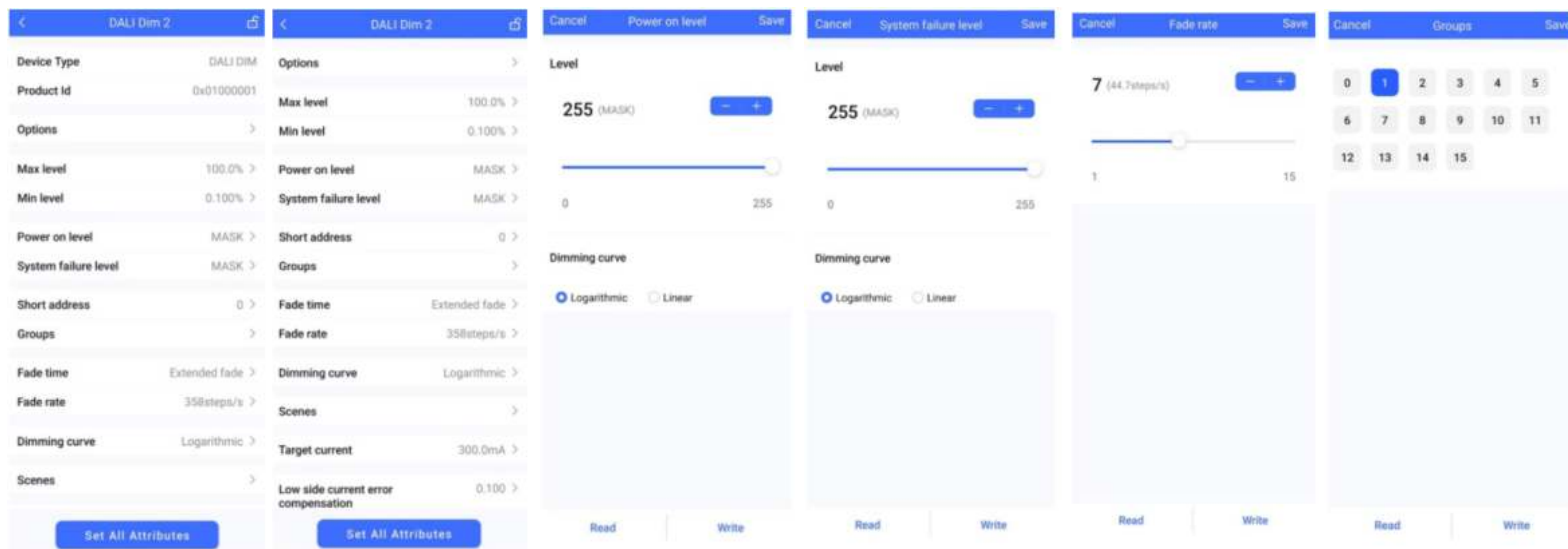

Step 5: After setting, please save the selected configuration via NFC and power on the device

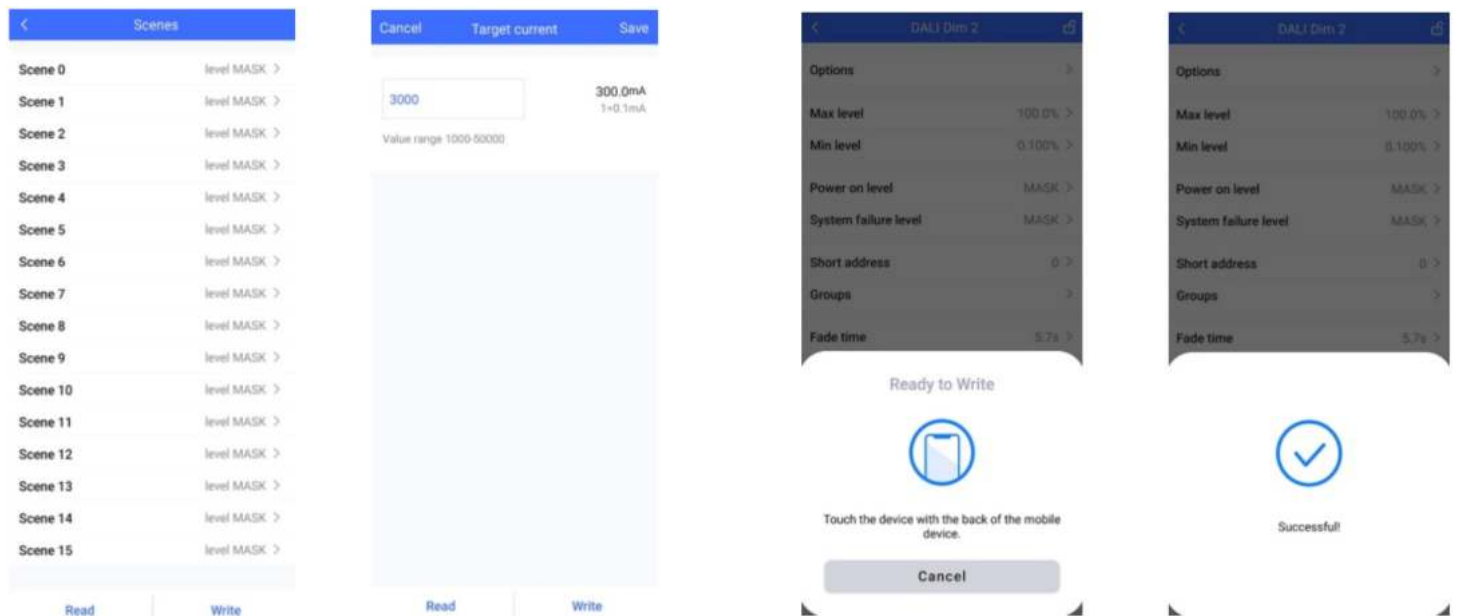


Notes:


1. NFC function doesn't require any power driver
2. Many functions can be configured by NFC. Kindly check your desired functions.
3. All of our DALI drivers are in the best performance within our DALI master/ gateway

CLO and Corridor DIM(CD) Function Instruction

Step 1: Open APP, and Find the CLO/CD functions

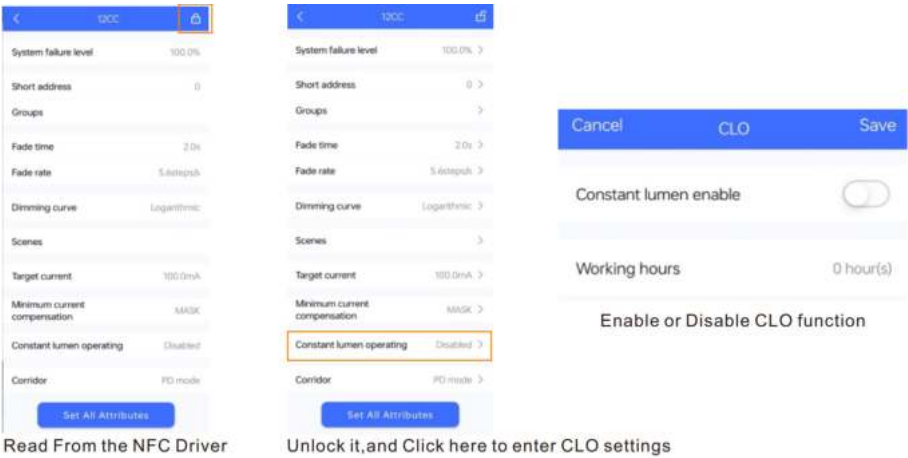


Step 2: Enter CLO Setting homepage

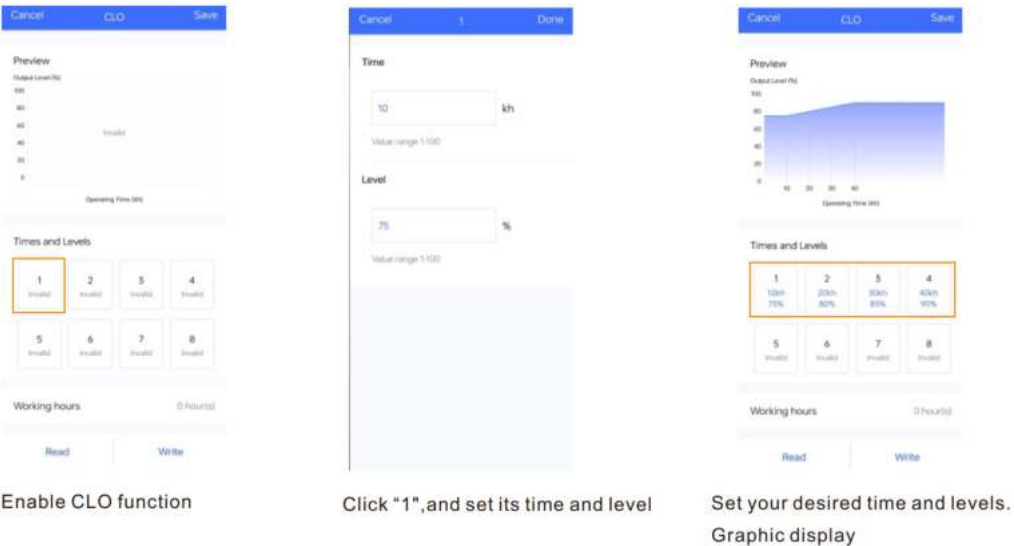

Note:

- 1. Working hours : Ability to calculate the working hours of a single driver

Step 3: Corridor dim(CD) function

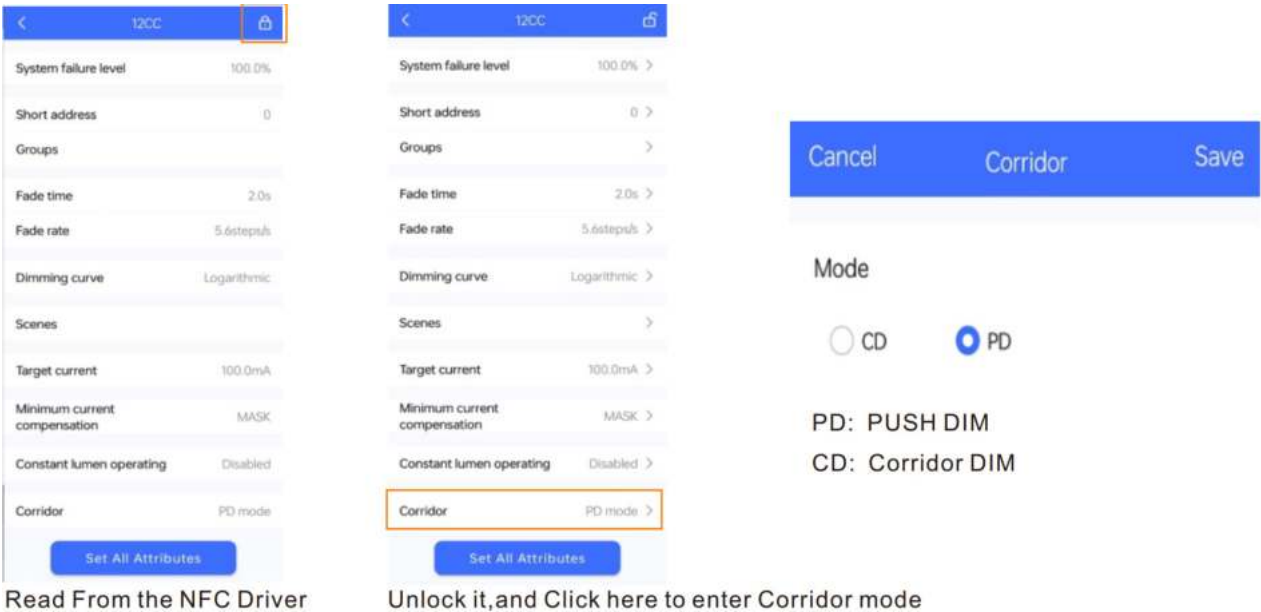

Operation

Step 4: Enter CD Setting homepage

CancelCorridorSave

Mode

CD

PD

Preview

Level (%)

Fade in time

5

s

Value range 0-100

Occupied time

Read

Write

CancelCorridorSave

Occupied time

120

s

Value range 0-60,000

Occupied level

100

%

Value range 0-100

Fade out time

5

s

Value range 0-100

Prolonged time

40

s

Read

Write

CancelCorridorSave

Prolonged time

60

s

Value range 0-60,000

Infinite

Prolonged level

20

%

Value range 0-100

Dim to off time

5

s

Value range 0-100

Read

Write

Notes:

1. You should select either CD mode or PD mode, but not both.
2. Under CD mode, you can realize it with normal (3rd party) AC sensor.

Additional Information

More

Write Consecutively

Advanced

App Version

1.0.10

Check for Update

Privacy Policy

Configurations

More

1. Please make sure your APP version is 1.0.10 or higher.
2. Please make sure NFC driver's firmware is available with CLO / CD functions