


CBI6012A

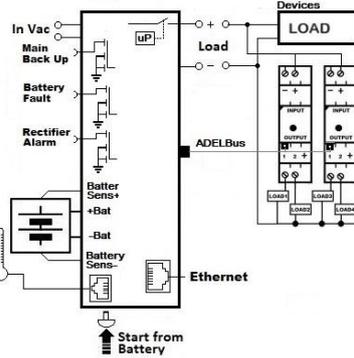

Input: Single-phase 115 - 230 - 277 Vac
Output Selectable Load: 12Vdc 4.5 A
Output Battery charging: 12 Vdc 4.5 A
 Suited for the following battery types: Open Lead Acid, Sealed Lead Acid, lead Gel, Ni-Cd, Li-Ion
 Automatic diagnostic of battery status, Battery Life Test function (internal Battery Impedance)
 Charging curve IUoU, constant voltage and current
 Four charging levels: Boost, Bulk, Trickle, Recovery
 Protected against short circuit and inverted polarity
Signal output: for battery Fault, Mains or Back-UP
Ethernet: SNMP V3, Modbus TCP/IP, HTTPS
DIN rail and Wall mount

New revolutionary product, with Ethernet on board provided with protocol connections: HTTP, HTTPS, SNMPv1/2c/3, Modbus TCP/IP. The device also features the ADELBus protocol for connecting other ADELSYSTEM devices.

Power Management: Thanks to the All In One units (DC-UPS), it will be possible to optimize power management. The available power is automatically allocated between load and battery, supplying power to the load is the first priority of the unit, therefore it is not necessary to double the power, because also the power going to the battery will go to the load if the load so requires. The maximum available current on the load output is 3 times the value of the device rated current I_n .

Battery Care: it is the concept based on algorithms that implement rapid and automatic charging, four charge phases, battery charge optimization during time, flat batteries recovery and real time diagnostic during installation and operation. The Real Time Auto-diagnostic system monitors battery faults such as sulfated or shorted battery elements, reverse polarity connection, disconnection of the battery; such faults can be easily detected and removed with the help of Diagnostic Blink Codes or through web server. The continuous monitoring of battery efficiency reduces battery damage risk and allows a safe operation in permanent connection. Each device is suited for all battery types, by means of manual configuration by push button or web server it is possible to set predefined curves for Open Lead Acid, Sealed Lead Acid, Gel, Ni-Cd (option). Five charging levels are pre-programmed (recovery, boost, bulk, absorption, float / trickle charge), but they can be changed by the user. With a rugged casing for DIN rail mounting, IP20 protection degree, the product is extremely compact and cost effective.

Interconnections: The platform communication for ADELSYSTEM devices allows the connection of all components in a simple but very powerful way via Ethernet. Communication is based on various protocol: Modbus TCP/IP, SNMP or HTTP/HTTPS, depending on your application. The CANopen-based ADELBus allows to communicate with all the accessories provided by ADELSYSTEM and to develop an independent system for electrical continuity. At the same time, it allows monitoring and control all parameters in the system, even from the other side of the world, by means of application tools on the cloud. ADELSYSTEM allows you to implement very simple but sophisticated monitoring and control for your energy system and opens your mind to new ways to approach your applications.

Norms and Certifications

- Approval: UL61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1-12, CSA C22.2 No. 61010-2-201.

- Compliance: EMC Directive 2014/30/UE and Low voltage Directive 2014/35/UE; EN IEC 62368-1; EN IEC 61000-6-2; EN IEC 61000-6-4.

Input Data

AC Input Voltage Nominal (CE Rating)	100-277 Vac		
AC Input Voltage Range (CE Rating)	90-305 Vac		
DC Input Voltage Nominal (CE Rating)	110-300 Vdc		
DC Input Voltage Range (CE Rating)	95-360 Vdc		
AC Input Voltage (UL Rating)	110-240 Vac ($\pm 10\%$)		
DC Input Voltage (UL Rating)	105-250 Vdc ($\pm 10\%$)		
AC Frequency	50-60 Hz ($\pm 10\%$)		
Input Current at nominal load (110-240 Vac)	1.2-0.7 A		
Power Factor typ. (115 – 230 Vac)	0.6 – 0.47		
Input Inrush Current Limiter	NTC		
Inrush Current ($V_n - I_n$ nom. Load) I^2t	$\leq 10 \text{ A} \leq 5 \text{ msec.}$		
Internal fuse (not replaceable)	4 A		
External Fuse (recommended) MCB curve B	6 A		
Input Current (No Load and Alarm)	Input 110Vac Input 230Vac Back Up		
Quiescent Current	20 mA	34 mA	27 mA
Ethernet Enabled	22 mA	34.5 mA	33.5 mA
CAN Enabled	21 mA	34 mA	30 mA
ETH+CAN Enabled	23 mA	34.5 mA	36.5 mA

Output Data


Output Voltage 12 Vdc	12 Vdc
Nominal current I_n	4.5 A $\pm 5\%$
Turn-On delay after applying mains voltage	1 sec. (max)
Start up with Strong Load (capacitive load)	Yes, Unlimited
Efficiency (at 50% of rated current)	$\geq 83\%$
Ripple and Noise (20 MHz Bandwidth)	80 mV _{pp} (max)
Dissipation power load max (W)	6
Start from Battery only, without main	Push Button
Short-circuit protection	Yes
Over Load protection	Yes
Over Voltage Output protection	Yes (typ. 35 Vdc)
Overheating Thermal protection	Yes

Load Output 12 Vdc (jumper selection)

Output voltage (at I_n)	10 - 14.4 Vdc (17Vdc Ni-Cd)
Continuous current (without battery) $I_{load} = I_n$	5 A
Continuous current (With battery) $I_{load} = I_n + I_{batt}$	2 x I_n
Max. Output Load (Main with Battery) $I_{load} = I_n + I_{batt}$ (4 sec.)	3 x I_n max. (A)
Max. current Output Load (Back Up) I_{load} (4 sec.)	2 x I_n max.
Output On/Off	Yes: Drive by Ethernet
Push Button –Terminal Input "Start from Battery without main"	Yes
Time Buffering; (switch output off without main input)	0.5;2;5;10;15; 20; 30; 45;60; ∞

Battery Output

Output Voltage Battery	Follow the Out Load
Boost-Fast charge Configuration 25°C (V/cell). Jumper Configuration battery type	Lead Acid: 2.4; NiCd: 1.51; LiFePO4: 3.65; Li-ion: 4.1
Float Charge Configuration 25°C (V/cell) Jumper Configuration battery type	Lead Acid: 2.23; 2.25; 2.27; 2.3 NiCd: 1.4; LiFePO4: 3.45; Li-ion: 4.1
Min. Time Boost/Fast charge (Typ. at IN)	1 min.
Max. Time Bulk charge (Typ. at IN)	15 h
Min. Time Bulk charge (Typ. At IN)	1 min.
Recovery Charge	2 - 10 V
End of charging Current (Bulk & Absorption charge)	6% of current limiting
Charging current max I_{batt}	$I_n \pm 5\%$
Charging current limiting I_{adj}	10 ÷ 100 % / I_{bat}
Reverse battery protection	Yes
Sulfated battery check	Yes (by Jumper)
Detection of element in short circuit	Yes

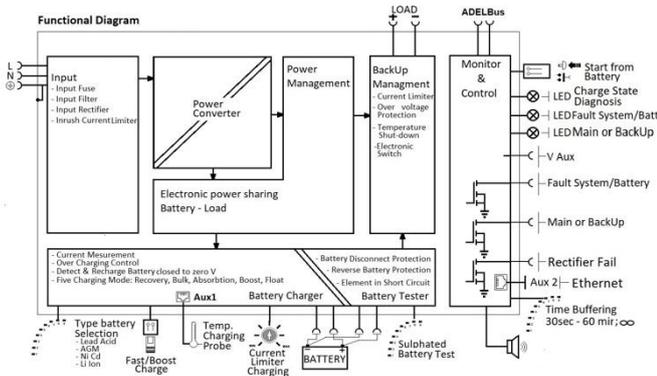

Quiescent Current on the battery	≤ 5 mA
Charging Curve automatic: IUoU	4 stage
Fast Charge	Boost /Float
Threshold alarm Battery almost flat	11.5 – 12 Vdc batt
Protections against total discharge	10 – 11 Vdc batt

Signal Output

Main or Backup Power (Sink 20 mA max)	ON: 0 Vdc OFF: Vout (Alarm)
Fault Battery / System (Sink 20 mA max)	ON: 0 Vdc OFF: Vout (Alarm)
Rectifier Failure "Device" (Sink 20 mA max)	ON: 0 Vdc OFF: Vout (Alarm)
V Aux: Auxiliary Output Voltage	22 - 28.8 Vdc / 50 mA
Acoustic Buzzer selectable, for:	Alarm features

Signal Input

Battery Start by:	Terminal Block or Push Button
Temp. Comp. Battery (with external probe)	RJ temp (RJ11)

Digital Input / Output

Communication Protocol (Ethernet)	TCP/IP - SNMP V3 - HTTPS
ADElBus	CAN Open

Climatic Data

Ambient temperature (operation)	-25 ÷ +70°C
De Rating T ² > 55°C	- 2.5%(In) / °C
Ambient temperature Storage	-40 ÷ +85°C
Humidity at 25 °C no condensation	95% to 25°C
Altitude: 0 to 2 000m - 0 to 6 560ft	No restrictions
Altitude: 2 000 to 6 000m - 6 560 to 20 000ft	De-rating 5°C/1000m
Cooling	Auto convection

General Data

Insulation voltage (IN/OUT)	3000 Vac
Insulation voltage (input / ground)	1605 Vac
Insulation voltage (Output / ground)	500 Vac
Protection Class (EN/IEC 60529)	IP20
Reliability: MTBF IEC 61709	> 300.000 h
Pollution Degree Environment	2
Protection class	II
Dimensions (w-h-d) DIN 43880	70x90x55 mm
Weight (Approx.)	0.40 kg