

Reinforced version


Model: HC018V /R, HC009S /R



In warehouses and big storage area, the mounting height can reach up to 15 meters. This demands a very long detection depth of the sensor. Hytronik reinforced version sensor is specially designed for this kind of application. The max. detection depth can reach 20 meters, with max. diameter of 16 meters.

The detection area can also be reduced to 75%, 50%, 30% and 10% to meet your particular need.

This reinforced detection is available in standard version HC009S /R, advanced version HC018V /R, , attachable version HC030S /R. please refer to the respective model page for detailed technical spec.

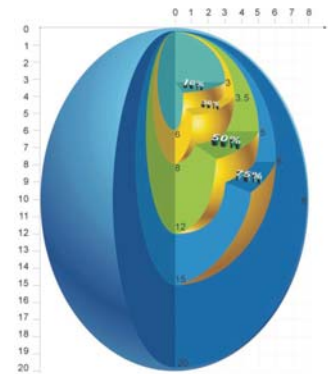

detection pattern



HC009S /R (page14)



HC018V /R (page20)



HC030S /R (page111)

100hours burn-in	Loop in Loop out	Ambient daylight threshold	Condominating control	100% Dim Off
zero-cross relay operation	sensorDIM®	Detection Pattern	Hold-time 5s~30min	2~50Lux

Example of highbay warehouse installation. Roof height 13 meters.

