




NSW17967



NSW22012


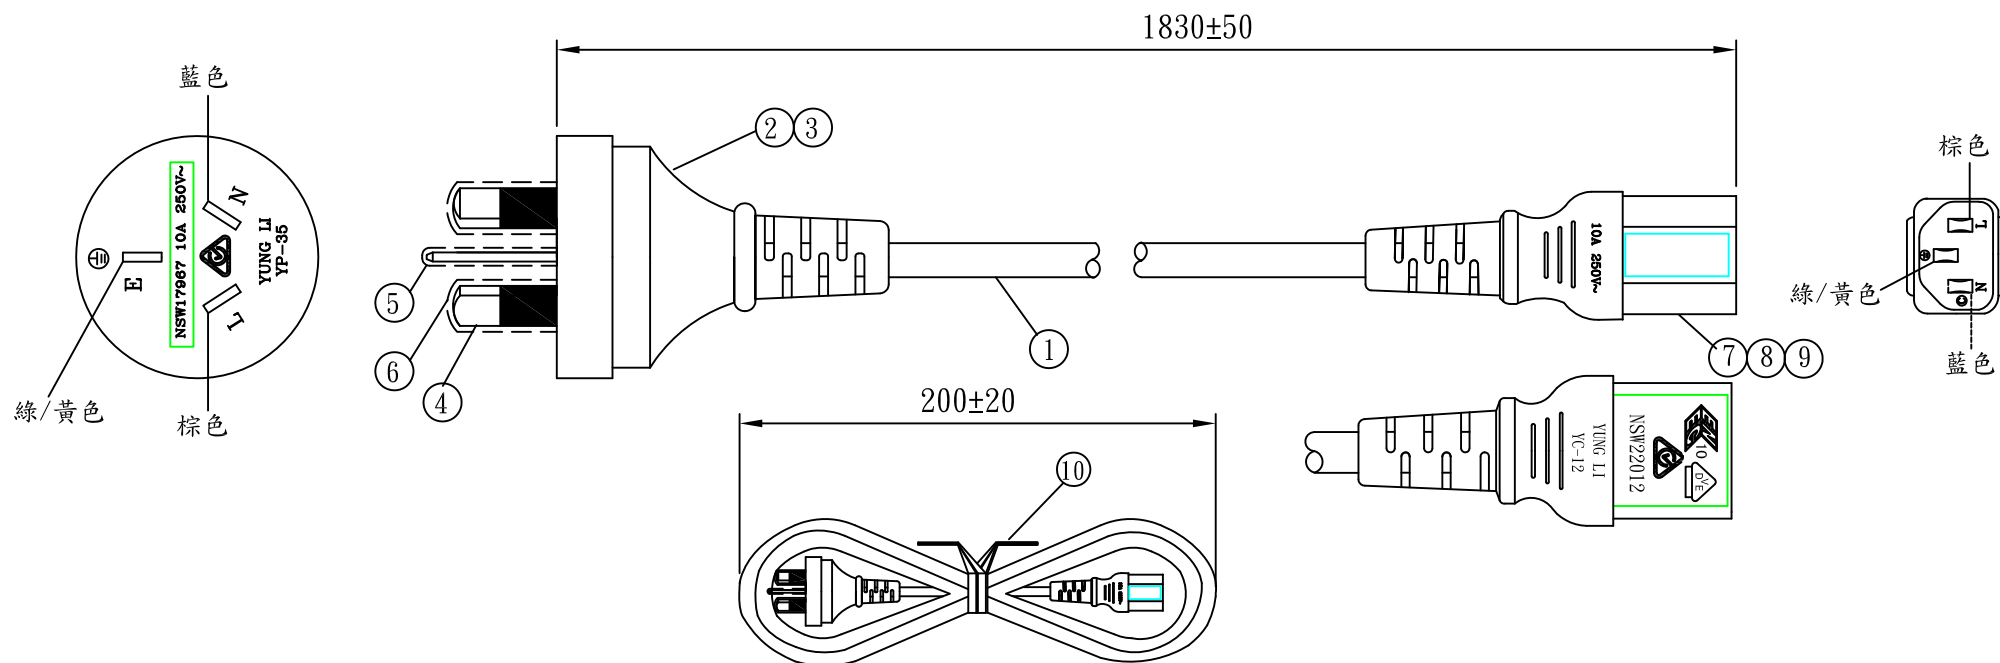


序號	品名規格	用量	備注
1	線材:H05VV-F 0.75/3G 黑色	1PC	1810±15(YL)
2	SAA澳式三插內模	1PC	
3	YP-35 黑色50P膠料	32g/PC	
4	SAA半絕緣銅片:P97658BS-1	2PCS	
5	SAA銅片:98658BS-1	1PC	
6	白色澳式護套	1PC	
7	97740BS-0端子	3PCS	
8	品字內模 白色	1PC	
9	YC-12 黑色50P膠料	18g/PC	
10	迷你帶:L=150mm 黑色	1PC	


一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	核准		日期		東莞永力電業有限公司			
	審核		日期		YUNG LI CO., LTD.			
	制圖	周淑萍	日期	18.01.09	客戶編號			
	型號	YP-35/YC-12			客戶料號			
	圖號	CY-S0008	版本	B	材 質	P. V. C	單位	mm
				單 重	182g			

認證號:

NSW17967

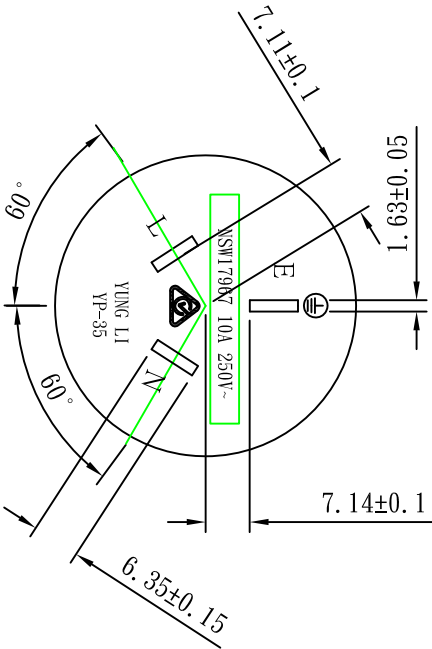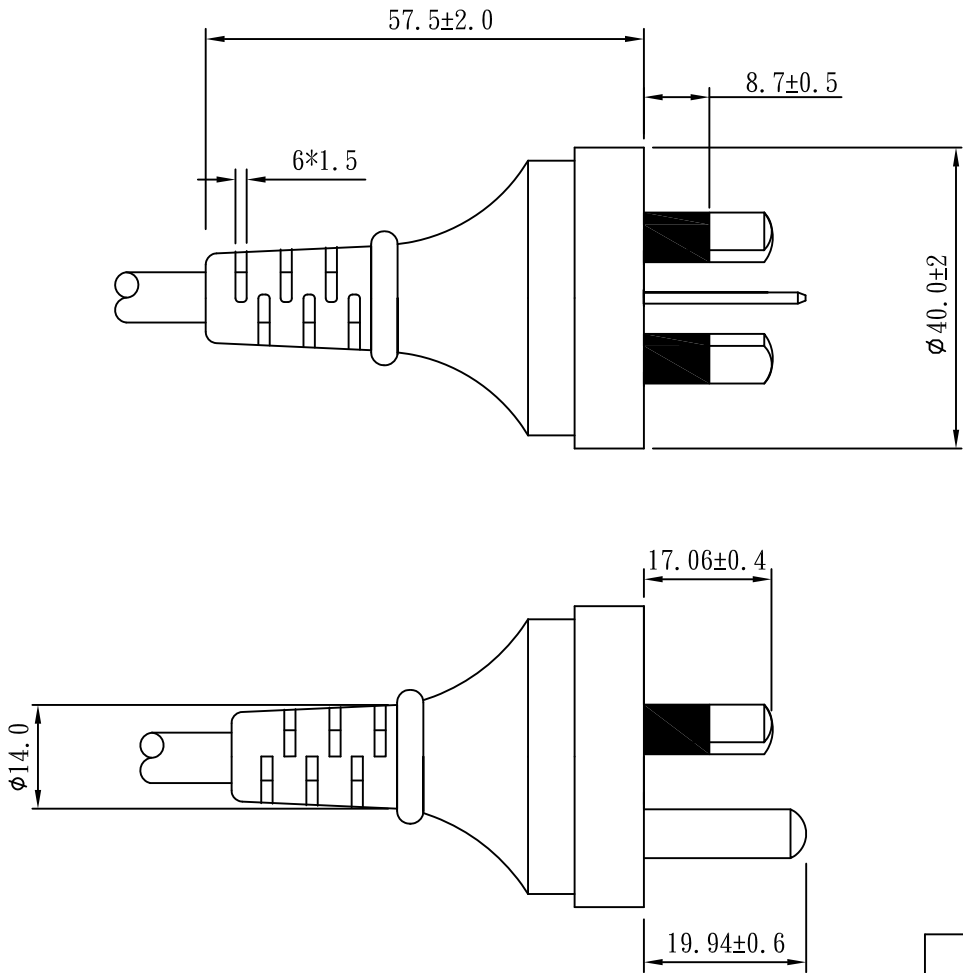

一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	核准		日期		東莞永力電業有限公司 YUNG LI CO., LTD.			
	審核		日期					
	制圖		日期					
	型號	YP-35(半絕緣)			料號			
	圖號	CY-P35B			材質	P.V.C	單位	mm
					比例	1:1		

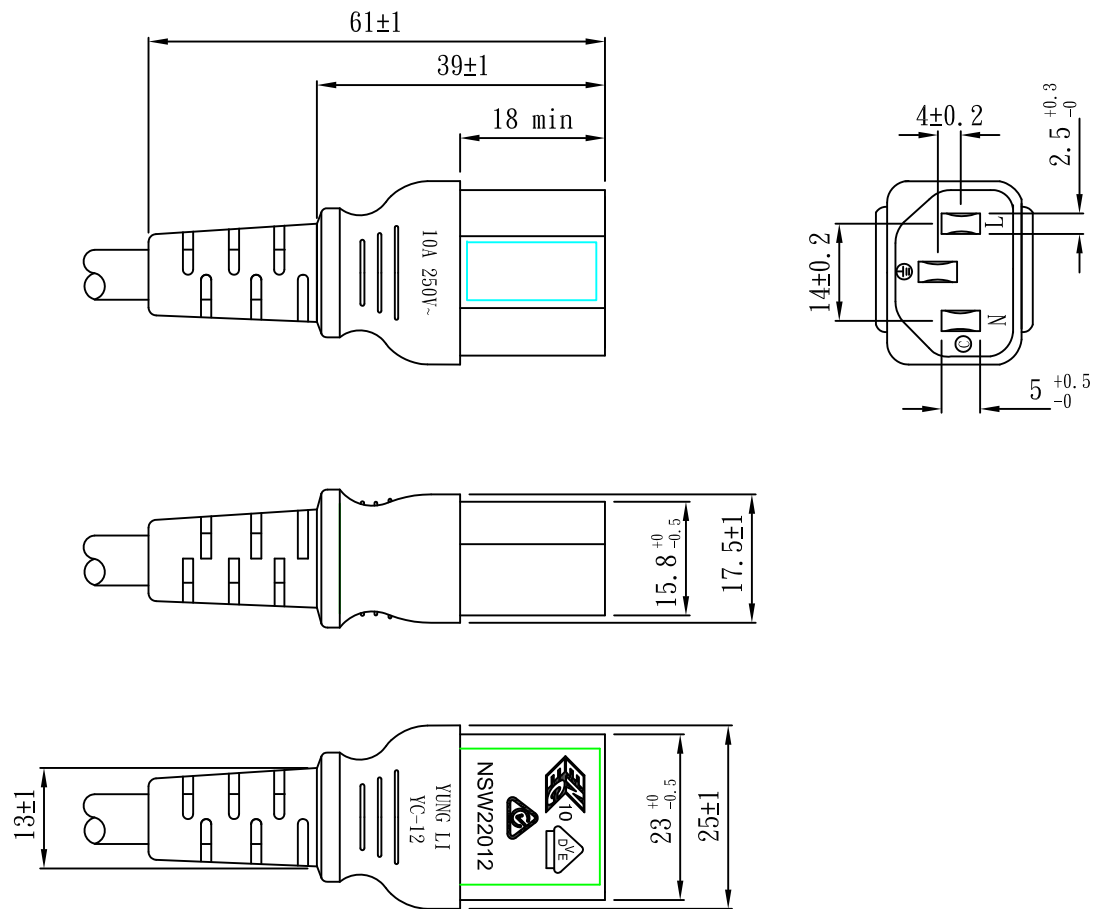

一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	核准		日期		東莞永力電業有限公司 YUNG LI CO., LTD.			
	審核		日期					
	制圖		日期					
	型號	YC-12(RCM)			料號			
	圖號				材質	P.V.C	單位	mm
					比例	1:1		

YUNG LI CO., LTD

SPECIFICATION

Yung Li	Style	PVC FLEXIBLE CORDS	Document No
2019.04.23			
Edition	Size	H05VV-F 3G 0.75mm² 凹字	Page
A			1/2

1. Standard: IEC 227 IEC228

2. Construction & Dimension

Item		Specification
Conductor	Size	3G 0.75mm ²
	Material	Annealed Bare Copper
	Construction	24/ § 0.2±0.01
Insulation	Material	PVC
	Minimum Average Thickness	0.60mm
	Minimum Thickness at any point	0.44mm
	Diameter	2.35 ± 0.10
	Identification	Blue,Brown,Green/Yellow
Core Assembly	Core Twist	3-Core
	Filler	NA
	Assembly Pair	NA
Taping	Mylar Foil	NA
Shielded	A1-Mylar Foil	NA
Drain	Material	NA
	Construction	NA
Jacket	Material	PVC
	Minimum Average Thickness	0.8mm
	Minimum Thickness at any point	0.58mm
	Overall Diameter(Approx)	6.7 ± 0.2
	Color	BLACK

Marking:

☒ Yung Li Co., Ltd. H05VV-F 3G 0.75mm² <VDE> NF-USE 1347  KEMA-KEUR  <ÖVE>
     IEMMEQU SAA-190646-EA  A004049 60227 IEC 53(RVV) 300/500V  SU01027-4002

YUNG LI CO., LTD

SPECIFICATION

Yung Li	Style	PVC FLEXIBLE CORDS	Document No
2019.04.23			
Edition	Size	H05VV-F 3G 0.75mm²	Page
A			2/2

4. Electrical & Physical Properties

Item		Specification	
Rating Voltage		70℃ 300/500V	
Conductor resistance(AT 20℃)		26.0Ω/Km MAX	
Insulation Resistance(AT 70℃)		0.011MΩ/Km Min	
Dielectric Strength		AC 2.0 KV / 15 min No Brak	
Spark Test		6.0KV	
Insulation	Unaged	Tensile Strength	1.02 kgf/mm ² min
		Elongation	150% Min
	Aged	Tensile Strength	80~120% (80℃ x168hrs)
		Elongation	80~120% (80℃ x168hrs)
	Loss of mass Test		2.0mg/cm ² (max)
Jacket	Unaged	Tensile Strength	1.02 kgf/mm ² min
		Elongation	150% Min
	Aged	Tensile Strength	80~120% (80℃ x168hrs)
		Elongation	80~120% (80℃ x168hrs)
	Loss of mass Test		2.0mg/cm ² (max)
Deformation Test		70±2℃ X 4hr ≤ 50%	
Cold Bend Test		-15℃ x 1hr No Crack	
Heat Shock Test		150±2℃ x 1hr No Crack	

Graph:

