


POWER SOURCE

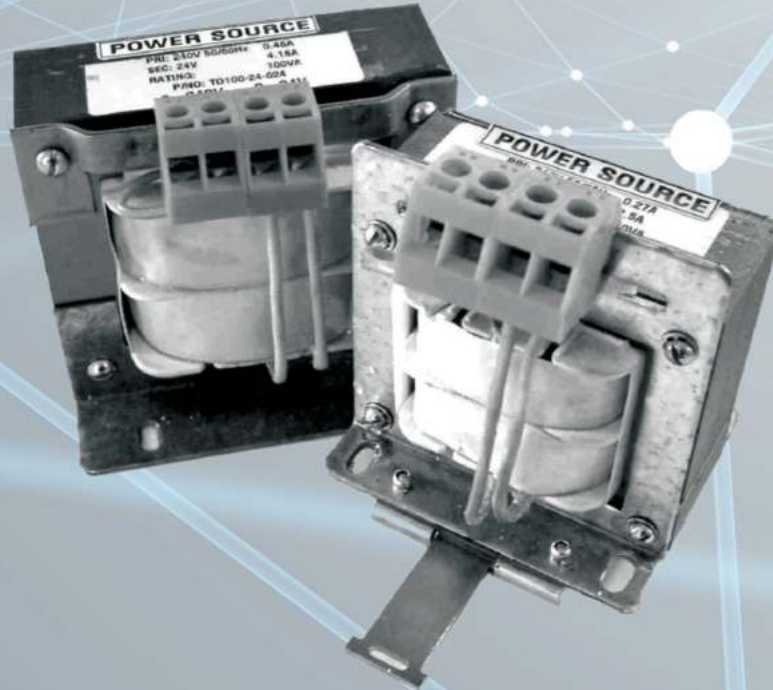

**1 YEAR
WARRANTY**

240W **TO SERIES** Single Phase Open Frame With Terminal Strip



Features of the: TO Series

- ✓ Low Loss Iron Core
- ✓ Slotted Holes For Fast Installation
- ✓ Separate Insulated Windings
- ✓ Quality Terminal Blocks
- ✓ Fully Impregnated With Tropic Proof Anti-Fungus Varnish
- ✓ 1 Year Warranty
- ✓ Manufactured To AS/NZ3108-1994
- ✓ Optional DIN Rail Mounting Clip

POWER SOURCE

| SPECIFICATIONS | |
|------------------------------|------------------|
| Input Voltage | 110V to 1000V AC |
| Frequency | 50/60Hz |
| Output Voltages ¹ | 6V to 1000V AC |
| Rating | 10VA to 10KVA |
| Insulation Class | H (155°C) |

| ¹ STANDARD VOLTAGES | |
|--------------------------------|-----------|
| 240V-12V | 415V-12V |
| 240V-24V | 415V-24V |
| 240V-32V | 415V-110V |
| 240V-110V | 415V-240V |

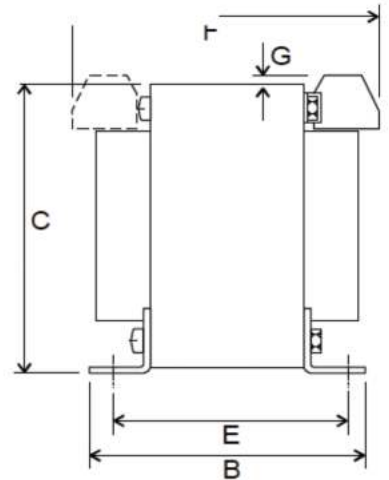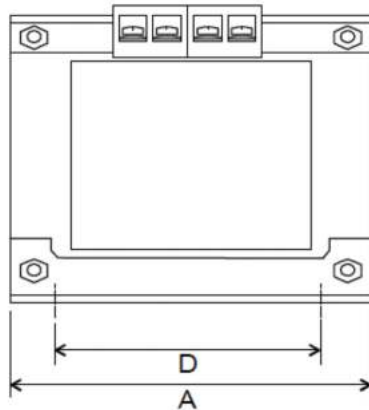

Ordering Instructions Dimensions

| Rating | A | B | C | D | E | Weight |
|--------|-------|-------|-------|-------|-------|--------|
| 10VA | 57mm | 52mm | 78mm | 47mm | 35mm | 0.5 kg |
| 20VA | 65mm | 58mm | 86mm | 55mm | 45mm | 0.8 kg |
| 40VA | 76mm | 60mm | 97mm | 62mm | 46mm | 1.1 kg |
| 60VA | 76mm | 67mm | 97mm | 62mm | 52mm | 1.3 kg |
| 75VA | 76mm | 78mm | 97mm | 62mm | 62mm | 1.9 kg |
| 100VA | 95mm | 68mm | 98mm | 82mm | 55mm | 2.3 kg |
| 150VA | 95mm | 87mm | 95mm | 83mm | 75mm | 3.0kg |
| 200VA | 95mm | 98mm | 102mm | 83mm | 84mm | 4.0kg |
| 250VA | 96mm | 113mm | 97mm | 83mm | 99mm | 4.6kg |
| 300VA | 114mm | 109mm | 114mm | 75mm | 92mm | 5.1kg |
| 400VA | 115mm | 131mm | 114mm | 75mm | 105mm | 6.4kg |
| 500VA | 133mm | 97mm | 134mm | 111mm | 77mm | 6.5kg |
| 750VA | 133mm | 123mm | 133mm | 111mm | 102mm | 9.0kg |
| 1000VA | 153mm | 125mm | 153mm | 110mm | 100mm | 10.6kg |
| 1250VA | 153mm | 152mm | 150mm | 112mm | 125mm | 13.8kg |
| 1500VA | 171mm | 139mm | 163mm | 120mm | 110mm | 19.0kg |
| 2000VA | 192mm | 140mm | 190mm | 160mm | 112mm | 24.5kg |
| 2500VA | 190mm | 189mm | 168mm | 160mm | 145mm | 27kg |
| 3000VA | 230mm | 160mm | 191mm | 190mm | 125mm | 30kg |
| 4000VA | 230mm | 185mm | 191mm | 190mm | 150mm | 36kg |
| 5000VA | 230mm | 210mm | 191mm | 190mm | 175mm | 44.2kg |